

## H-18SP

**POWERFUL sub-woofer**  
Loudspeaker

### SPECIFICATIONS

Frequency Range	40 Hz - 500 Hz @ -10 dB
Maximum SPL	126 dB
Crossover Frequency	100 Hz
Amplifier Power	650W 10ms burst, 300W Continuous
Line Input Sensitivity	-12 dBu to 0 dBu for full output
Power Requirement	110-130 VAC, 50-60Hz, or 220-240 VAC, 50-60Hz 700 Watts
Connectors	XLR Balanced Line Input / Output
Enclosure Construction	18 mm birch plywood with structured
Finish	Wear-resistant textured black paint
Grille	Powder coated perforated steel, foam backed
Options	1 x Integral pole mount socket
Dimensions (H x W x D)	706 mm x 516 mm x 680 mm
Net Weight	53 kg

### DRIVERS

Low Frequency :  
1 x 18(in) 460 mm dia , 115 mm(4.5in)voice coil dia

### FEATURES

- Active subwoofer system
- Integrity short-circuit, loading, and cross-current protection equipment
- Adjust LF crossover point by inner function
- of frequency adjustment easily operation and portable



### APPLICATIONS

- cinema, club, KTV room, and touring performance


### DESCRIPTIONS

H18SP consists of one built-in 18"high power, long-throw LF speaker and amplifier with 650W, curved horn design to supply high efficiency LF power output. Amplifier possess integrity protection settings, frequency adjustment, 0° /180° phase switch, the signal is stereo and balance input-output. There is a support pole on its top, allowing H-10ND, 12ND,15ND to be stand up.


### FREQUENCY RESPONSE

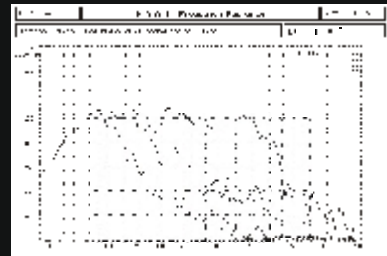


Front



Back



Side



Top