



KT-228

2-WAY full-range
Loudspeaker

SPECIFICATIONS

Frequency Response	60 Hz - 20 kHz (± 3 dB)
Sensitivity	93 dB SPL (1W @ 1m)
Nominal Impedance	4 ohms
Power Handling	180 watts (rms) , 720 watts (peak)
Maximum SPL	115 dB
Nominal Dispersion	100° horizontal, 100° vertical
Crossover Frequency	2.2 kHz
Enclosure Construction	15 mm Medium Density Fiberboard with rugged wear-resistant textured coating
Grille	Powder coated perforated steel, foam fronted
Rigging	4 x M8 internal rigging points
Input Connectors	2-way binding posts
Dimensions(H x W x D)	325mm x 458 mm x 280mm
Net Weight	11.8 kg

DRIVERS

Low Frequency: 2 x 8(inch) 210 mm dia , 35 mm(1.5inch)voice coil dia
High Frequency: 1 x 1(inch) 25 mm voice coil dia

FEATURES

- 2-way full range loudspeaker
- Included-angle cabinet structure
- Phase-converted LF radiation



APPLICATIONS

- Small venue, conference rooms, bars, clubs, auditoriums, churches, restaurants, commercial spaces and multiple.


DESCRIPTIONS

KT-228 consists of two 8" MF driver and one 1" HF, 6-angle trapezoidal cabinet. HF installed separately on both sides of MF/LF, significantly widens HF horizontal dispersion. The system also features phase-converted LF radiation, with built-in HF protection equipment.

FREQUENCY RESPONSE

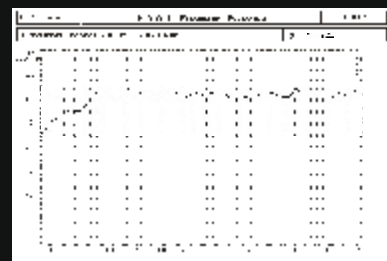

Front



Side



Top