



KT-8

2-WAY full-range
Loudspeaker

SPECIFICATIONS

Frequency Response	75 Hz - 20 kHz (± 3 dB)
Sensitivity	90 dB SPL (1W @ 1m)
Nominal Impedance	8 ohms
Power Handling	100 watts (rms) , 400 watts (peak)
Maximum SPL	110 dB
Nominal Dispersion	100° horizontal, 100° vertical
Crossover Frequency	2.2 kHz
Enclosure Construction	15 mm Medium Density Fiberboard
Finish	Wear-resistant textured black paint
Grille	Powder coated perforated steel, foam fronted
Rigging	4 x M8 internal rigging points
Input Connectors	2-way binding posts
Dimensions(H x W x D)	258mm x 450 mm x 270mm
Net Weight	9.5kg

DRIVERS

Low Frequency: 1 x 8(inch) 210 mm dia , 35 mm(1.5inch)voice coil dia
Mid-High Frequency: 2 x 3.8(inch) 98 mm dia.

FEATURES

- 2-way full range loudspeaker
- 6-angle trapezoidal cabinet
- Phase-converted LF radiation



APPLICATIONS

- Conference room ,KTV room ,club


DESCRIPTIONS

KT-8 consists of one 8" MF driver and two 3.8" fiber-coned HF, in a 6-angle trapezoidal cabinet. HF installed separately on both sides of MF/LF, significantly widens HF horizontal dispersion. The system also features phase-converted LF radiation, with built-in HF protection equipment.


FREQUENCY RESPONSE

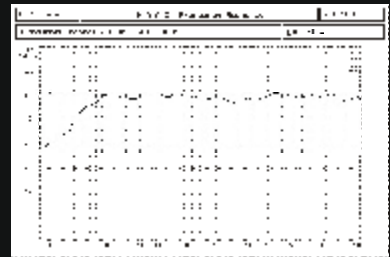

Front



Side



Top